

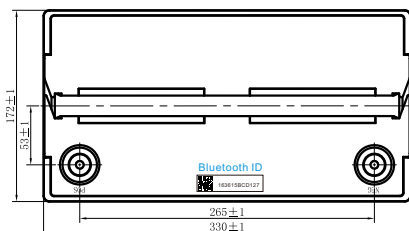



Dimension:

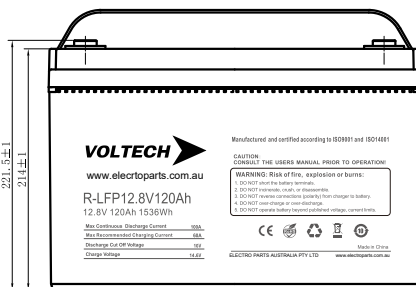

Unit: mm

SAFETY

- + Prismatic LiFePO₄ cells, Longer cycle life and much more safety.
- + UN38.3, CE certification for system.
- + The cycle life over 3000 times @80%DOD

DESIGN

- + ABS container, replace VRLA battery perfectly.
- + Fast charge performance.
- + -20~+55°C widely temperature range.
- + Maintenance free.

BATTERY MANAGEMENT SYSTEM (BMS)

- + Integrated BMS inside.
- + Independent protection for charge and discharge.
- + OVP, LVP, OTP, LTP, OCP, Short circuit protection.

For more information, contact with: sales@electroparts.com.au

12.8V120Ah

Specification

Model	R-LFP12.8V120AH
Nominal Voltage [V]	12.8
Nominal Capacity [Ah]	120
Total Energy [Wh]	1536
Max. Charging Current [A]	100
Recommended Charging Current [A]	60
Charging Voltage [V]	14.6
Max. Discharging Current [A]	100
End of Discharge Voltage [V]	11.2
Pulse Discharge Current	125A @ 5S
Dimension (W*D*H, mm)	330*173*214
Weight [Kg]	12.8
Operation Humidity	0~95% RH (No condensing)
Operating Temperature Range	Charge: 0 ~ +50 °C; Discharge: -20 ~ +55 °C
Protection	Over charge, Over discharge, Over current, Over temperature, Low temperature, Short circuit
Parallel Support	Yes, Max. 2 Pcs.
Series Support	Yes, Max. 4 Pcs.
Cycle Life ¹	>3000 cycles
Designed Calendar Life	>10 Years
Warranty	3 Years

Note:

1. 80% DOD and to 80% of initial capacity.

The datasheet is subject to change without prior notification

For more information, contact with: sales@electroparts.com.au