




# 160 Watt SP-160MB

210mm 33Cells PV Module

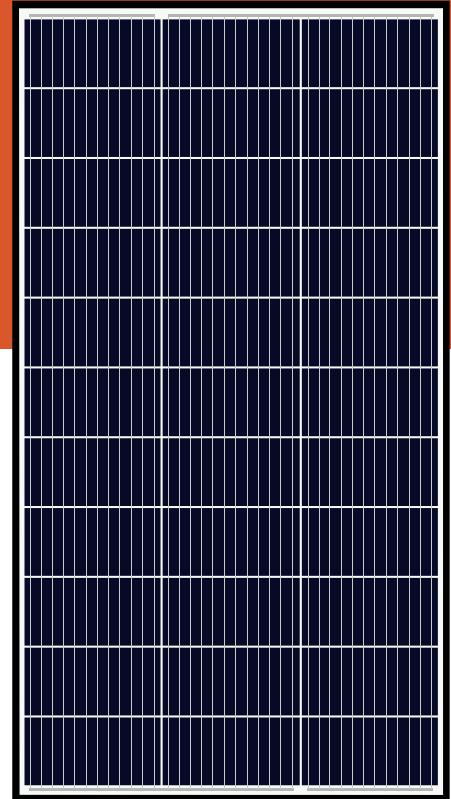

## Electrical Characteristics

Module Type	SP-160MB
	STC
Maximum Power- Pmax(W)	160
Open Circuit Voltage - Voc(V)	23.76
Short- Circuit Current - Isc(A)	8.57
Voltage at Pmax -Vmp(V)	19.80
Current at Pmax - Imp(A)	8.09
Module Efficiency - $\eta$ m(%)	19.49
Power Tolerance(W)	0~+4.99W
Maximum System Voltage(V)	1000VDC (IEC)
Maximum Series Fuse Rating (A)	10A

STC :Irradiance 1000W/m<sup>2</sup>Cell Temperature 25°CAM 1.5


## Mechanical Specifications

External Dimensions	1225*670*30mm
Weight	8.4kg±0.3kg
Solar Cells	Mono crystalline 210X105mm (3X11pcs)
Front Glass	3.2 mm tempered glass
Frame	Aluminum (Black Frame)
Junction Box	IP67
Output Cables	90cm, length can be customized
Connector	MC4 Compatible
Mechanical Load	Front Side Max. 5400Pa, Rear Side Max. 2400Pa

## Temperature Characteristics

Pmax Temperature Coefficient	-0.350%/C
Voc Temperature Coefficient	-0.370%/C
Isc Temperature Coefficient	+0.045%/C
Operating Temperature	-40~+85 C
Nominal Operating Cell Temperature(NOCT)	48±2 C


## Engineering Diagrams (mm)

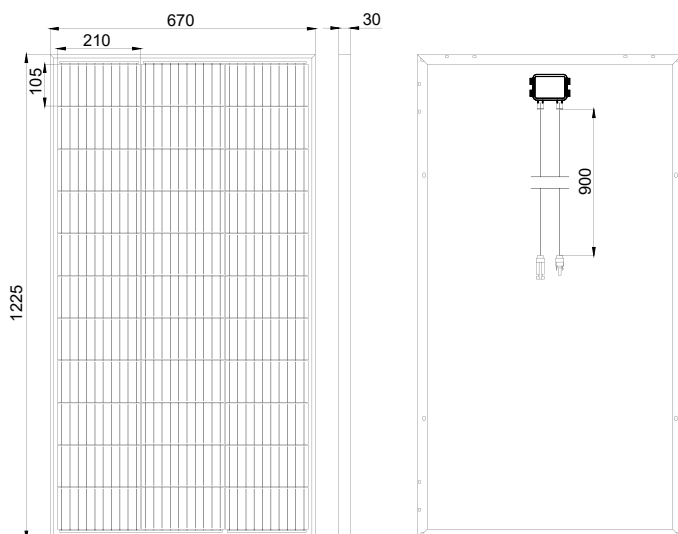

## Packing Configuration

Module Type	SP-160MB
Module Dimensions	1225*670*30mm
Pallet Dimensions	1265*1100*840mm
Pallet Weight	280kg
Pieces/Pallet	31pcs

## Characteristic Curve

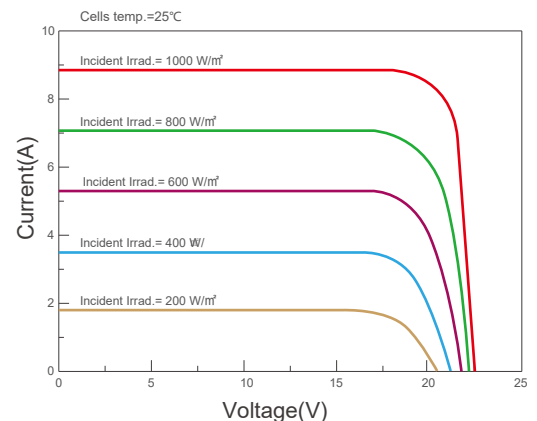

Specs are subject to change without further notification

**EP** ELECTRO PARTS  
AUSTRALIA PTY LTD

51 Southlink St, Parkinson, 4115, QLD  
P: 1300 10 60 10 | W: www.electroparts.com.au